

IMPAC IGAR 6 ADVANCED

Stationary, digital ratio pyrometer with possible combination of 1-color and 2-color non-contact temperature measurement in ranges between 100 and 2000°C (212 to 3632°F).



The Impac® IGAR 6 Advanced is a digital, compact and fast infrared thermometer that can be operated in different modes: 1-color mode, 2-color mode or a special smart mode. In smart mode, measurements in the range between 100 to 250°C are taken in 1-color mode whereas in the range between 280 to 2000°C the measurements are based on the 2-color method (ratio method).

PRODUCT HIGHLIGHTS

- Wide temperature ranges and various operating modes
- Automatic emissivity determination
- “Dirty Window” warning
- Fully digital core for sub-ranging and adopted analog output
- Very fast 2 ms response time for highly dynamic processes
- Best optics in its class with manual focus capability
- 4 digit LED display
- Robust, stainless steel sensor for harsh environments (IP65/NEMA4)

TYPICAL APPLICATIONS

- Steel making
- Metal induction processes: hardening, tempering, annealing, soldering, brazing, welding, forging, etc.
- Metal processes: wire/rod mill, heating and cooling processes
- Sintering
- Vacuum processes - e.g. coating, brazing, etc.
- Laser applications

AT A GLANCE

Temperature Ranges

1-color: 100 to 2000°C

Smart mode: 100 to 2000°C

2-color mode: 250 to 2000°C

Spectral Range

Ch. 1: 1.5 to 1.6 μm

Ch. 2: 2.0 to 2.5 μm

Measurement Uncertainty

< 1500°C: 0.4% oR + 2°C

> 1500°C: 0.8% oR in °C

Repeatability

0.8% oR in °C

Optics

Manually focusable between 210 to 5000 mm

Field of View

min 100:1 (min. 2.1 mm)

Option: line optics

Alignment

Laser targeting or through-lens sighting or color TV camera


OVERVIEW

In the IGAR 6 ratio method (2-color mode), two adjacent wavelengths are used for the temperature determination. In the range from 250 to 280°C, a continuous transition from 1-color to 2-color measurement automatically takes place. This technique offers the following advantages compared to standard 1-color pyrometers:

- The temperature measurement is largely independent of the object’s emissivity and in wide ranges unaffected by dust and other contaminants in the field of view.
- The measuring object can be smaller than the spot size, measurements through dirty viewing windows are possible up to a certain contamination.

The response time of only 2 ms facilitates the measurement of fast processes. The IGAR 6 is also equipped with a built-in “dirty window” warning.

The pyrometer can be connected to a PC through an RS485 to USB connection, enabling parameter adjustments to be made using the InfraWin software. This can be used for temperature indication, data logging and further analyzing of complete temperature processes.

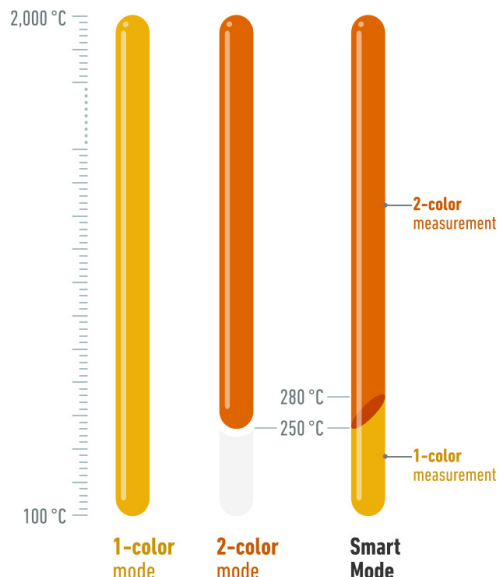

When the instrument is operated in 2-color or smart mode, InfraWin provides the option to automatically determine the emissivity. By pushing the button “Emi=xxx% Accept”, this emissivity is set and used for all measurements in 1-color mode or in smart mode below 280°C.

TECHNICAL DATA

| Measurement Specifications | |
|---|--|
| Temperature Range | 1-color and Smart mode: 100 to 2000°C (212 to 3632°F) 2-color (ratio) mode: 250 to 2000°C (482 to 3632°F) |
| Sub Range | Any range adjustable within the temperature range, minimum span: 50°C |
| Spectral Ranges | Channel 1: 1.5 to 1.6 µm Channel 2: 2.0 to 2.5 µm |
| Resolution | 0.1°C or 0.2°F at interface < 0.0015% of selected sub range at analog output, min. 0.1°C, 16 bit; 1°C or 1°F on display |
| Emissivity ε | 0.050 to 1.000 in steps of 1/1000 (1-color mode) |
| Transmittance τ | 0.050 to 1.000 in steps of 1/1000 (1-color mode) |
| Emissivity Slope κ | 0.600 to 2.000 in steps of 1/1000 (2-color mode) |
| Measurement Uncertainty (κ = 1, t ₉₀ = 1 S, T _{amb} = 25 °C) | < 1500°C: 0.4% of reading in °C + 2°C > 1500°C: 0.8% of reading in °C |
| Repeatability (κ = 1, t ₉₀ = 1 S, T _{amb} = 25 °C) | 0.2% of reading in °C + 1°C |

TECHNICAL DATA (CONTINUED)

| Optical Specifications | |
|------------------------|--|
| Sighting | Built-in laser aiming light (max. power level < 1 mW, $\lambda = 630$ to 680 nm, CDRH class II) or through-lens sighting |
| Optics | Manually focusable from rear cover measuring distance $a = 210$ to 5000 mm |
| Distance Ratio | Approx. 100:1 |

| Electrical | |
|----------------------|---|
| Power Supply | 24 VDC $\pm 25\%$, ripple must be less than 50 mV |
| Power Consumption | Approximately 3 W (including laser) |
| Load (analog output) | 0 to 500 Ω |
| Isolation | Power supply, analog output and digital interface are electrically isolated from each other |



| Environmental Specifications | |
|------------------------------|---|
| Protection Class | IP 65 IEC 60529 (value in mated condition) |
| Operating Position | Any |
| Ambient Temperature | 0 to 65°C (32 to 149°F) at housing |
| Storage Temperature | -20 to 80°C (-4 to 176°F) |
| Relative Humidity | Non-condensating conditions |
| Weight | 0.6 kg |
| Housing | Stainless steel |
| CE Label | According to EU directives about electromagnetic immunity |

| Interface | |
|-------------------------|--|
| Connection | 12-pin connector |
| Display (in rear cover) | LED, 4 digit matrix, 5 mm high for 2-color or 1-color temperature signal or measuring distance |
| Parameters | Adjustable via interface: 2-color / 1-color temperature signal, smart mode, metal mode, accordingly emissivity slope or emissivity, temperature sub range, settings for maximum value storage, address, baud rate, switch off limit, "dirty window" warning, transmittance, response time t_{90} , 0 to 20 mA or 4 to 20 mA analog output range, °C/°F |
| | Readable via interface: measured value, internal temperature of the unit, measuring distance |

| Communication | |
|------------------------|---|
| Analog Output | Adjustable 0 to 20 mA or 4 to 20 mA, linear (via digital interface) |
| Digital Interface | RS485 addressable (half-duplex) |
| | Baud rate: 1200 to 115.2 kBd (on request RS232, not addressable) |
| Switch Off Limit | 2% to 50% (adjustable via interface) |
| "Dirty Window" Warning | Relay contact, max. continuous current 0.4 A, setting of the warning level: 0 (off) to 99% |
| Response Time t_{90} | 2 ms (with dynamic adaption at low signal levels); adjustable to min, 0.01 s, 0.05 s, 0.25 s, 1 s, 3 s, 10 s |
| Maximum Value Storage | Built-in single or double storage |
| | Clearing with adjusted time t_{clear} (off, 0.01 s, 0.05 s, 0.25 s, 1 s, 5 s, 25 s), via interface, automatically with the next measuring object, external contact, hold-function |

¹ MB is a shortcut used for temperature range (in German: Messbereich).
 The determination of the technical data of this pyrometer is carried out in accordance with VDI/VDE IEC TS 62942-2, the calibration / adjustment in accordance with VDI/VDE 3511, Part 4.4.

PRODUCT SCHEMATIC

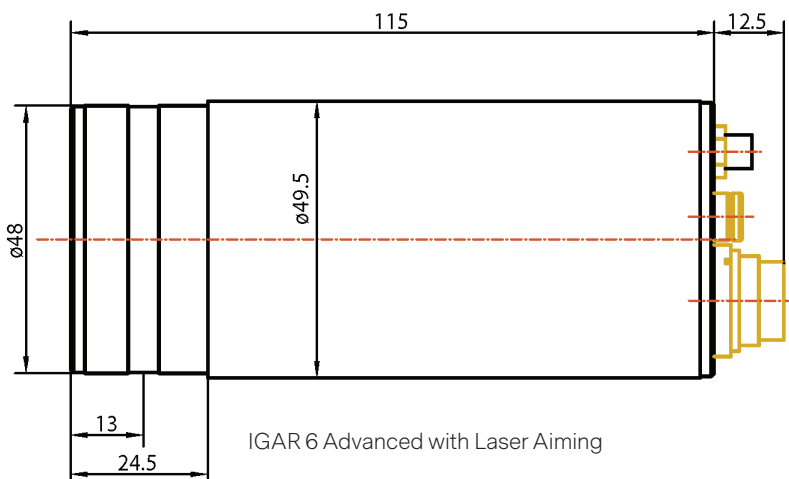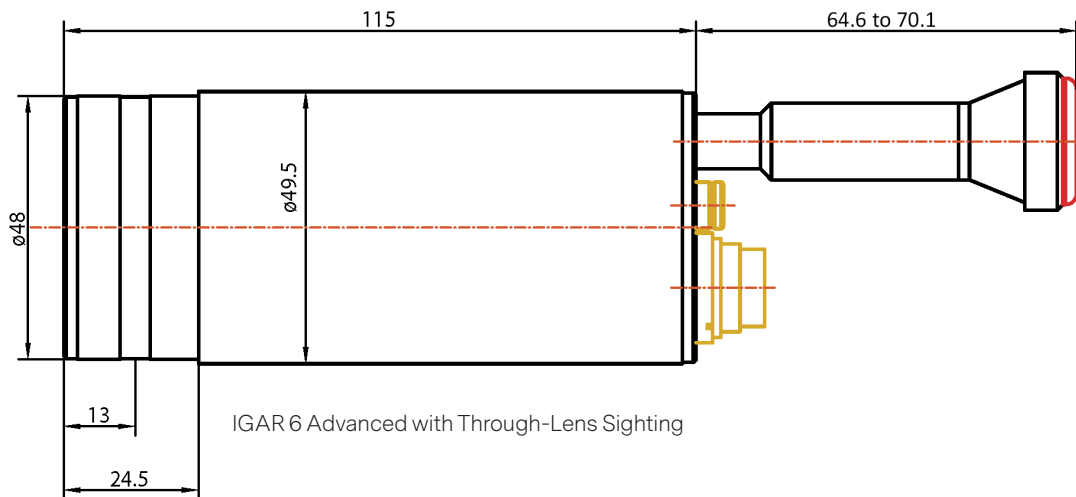

Dimensions in mm

SIGHTING

IGAR 6 Advanced with Through-Lens Sighting

IGAR 6 Advanced with Laser Aiming




OPTICS

| IGAR 6 Advanced | |
|-----------------|----------------------|
| Distance a [mm] | 100 to 2000°C |
| | Spot diameter M [mm] |
| 210 | 2.1 |
| 300 | 3 |
| 500 | 5 |
| 800 | 8 |
| 1300 | 13 |
| 2000 | 20 |
| 5000 | 50 |

The optics can be manually adjusted at all distances between 210 mm and 5000 mm. The table shows examples of distances and the corresponding spot diameters.

Effective aperture D for all temperature ranges: 13 mm (focused to longest distance) to 15 mm (focused to shortest distance).

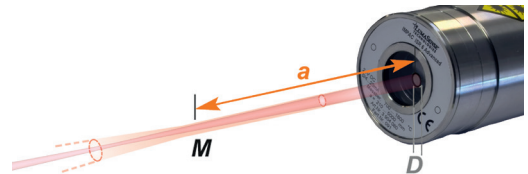

Optional Integrated Line Optics

In addition to the standard optical heads, the IGAR 6 is available with an optional integrated line optics which features a special spot in shape of a line. It provides additional advantages for some applications such as wire production or pouring stream measurements.

The length of the spot equals 5% of the measuring distance.



REFERENCE NUMBERS

| IGAR 6 Advanced | | | |
|-------------------|----------------------------|-------------------|--|
| Temperature Range | With Through-Lens Sighting | With Laser Aiming | With Laser Targeting and Line Shaped Spot (5%) |
| 100 to 2000°C | 3 914 710 | 3 914 700 | 3 914 780 |

Scope of Delivery

Pyrometer, PC adjustment and evaluation software InfraWin, works certificate, and operating instructions.

Ordering Note

A connection cable is not included in scope of delivery and must be ordered separately.

ACCESSORIES

| PN | Description |
|-----------|---|
| 3 820 330 | Connection cable, 5 m, straight connector ¹ |
| 3 820 500 | Connection cable, 10 m, straight connector ¹ |
| 3 820 510 | Connection cable, 15 m, straight connector ¹ |
| 3 820 810 | Connection cable, 20 m, straight connector ¹ |
| 3 820 820 | Connection cable, 25 m, straight connector ¹ |
| 3 820 520 | Connection cable, 30 m, straight connector ¹ |
| 3 820 340 | Connection cable, 5 m, 90° connector ¹ |
| 3 820 530 | Connection cable, 10 m, 90° connector ¹ |
| 3 820 540 | Connection cable, 15 m, 90° connector ¹ |
| 3 820 830 | Connection cable, 20 m, 90° connector ¹ |
| 3 820 840 | Connection cable, 25 m, 90° connector ¹ |
| 3 820 550 | Connection cable, 30 m, 90° connector ¹ |
| 3 852 290 | Power supply NG DC for DIN rail mounting; 100 to 240 VAC ⇒ 24 VDC, 1 A |
| 3 852 550 | Power supply NG 2D for DIN rail mounting; 85 to 265 VAC ⇒ 24 VDC, 600 mA with 2 settable limit switches |
| 3 826 750 | USB-RS485 adaptor cable, 1.8m, HS Version 4.5 Mbd |
| 3 826 510 | PI 6000: PID programmable controller, very fast, for digital IMPAC pyrometers |
| 3 890 640 | DA 4000-N: LED digital display to be built into the switchboard |
| 3 890 650 | DA 4000: LED-display, 2-wire power supply, 2 limit switches (relay contacts), 230 VAC |
| 3 890 570 | DA 6000-N digital display, to allow adjustment of Pyrometer through RS485 interface |
| 3 890 530 | DA 6000: like the DA 6000-N, but with analog input and 2 limit switches for the RS485 interface. |
| 3 890 630 | LD24-UTP; large digital indicator, 57 mm height of digits |
| 3 843 250 | ROT 5 scanning mirror attachment up to 70° |
| 3 843 490 | SCA 5, External Scanner Series 5 and 6 with fused silica window, 24 VAC/DC |
| 3 846 260 | Instrument's support (Series 5 and 6) |
| 3 834 210 | Adjustable mounting support (Series 5 and 6) |
| 3 846 290 | Instrument's support (Series 5 and 6) with fused silica window |
| 3 835 590 | 90° mirror with quartz glass window (Series 5 and 6) |
| 3 835 160 | Air purge unit, aluminium |
| 3 837 230 | Water cooling jacket (heavy duty) with integrated air purge unit |
| 3 837 540 | Cooling plate for series 5 and 6, with air purge |
| 3 846 590 | Vacuum flange KF16 with quartz glass window |

¹ All connection cables include a short adapter cable with a 9-pin SUB-D connector. This connector may be used in combination with the RS485 to USB adapter.

INFRAWIN 5 OVERVIEW

InfraWin is easy-to-use measurement and evaluation software for remote configuration of stationary, digital Impac brand pyrometers.


This software allows the user to remotely adjust and control settings for one or two pyrometers from a single computer. InfraWin also allows the user to simultaneously monitor and control temperatures.

- Display temperature data as color bars and online graphics
- Capture downstream evaluations as tables, graphics or text files
- Calculate the spot size for different measuring distances
- Features UPP standard (Universal Pyrometer Protocol)


Pyrometer Settings

An Impac digital pyrometer connected to a PC will be automatically detected by the software. All available parameters are adjustable, including emissivity, response time, maximum value storage, output signal and sub range.

Further special functions are adjustable for example controllers or TV parameters on instruments available with these functions. Changes are transmitted directly to the pyrometer.

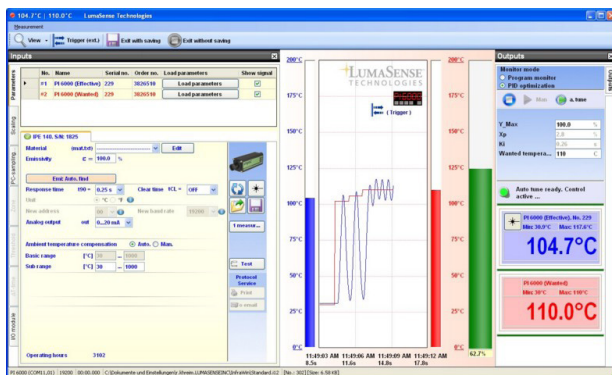

Measurement with Internal Temperature of radiation temperature and internal instrument temperature. Parameters can be changed during the measurement.

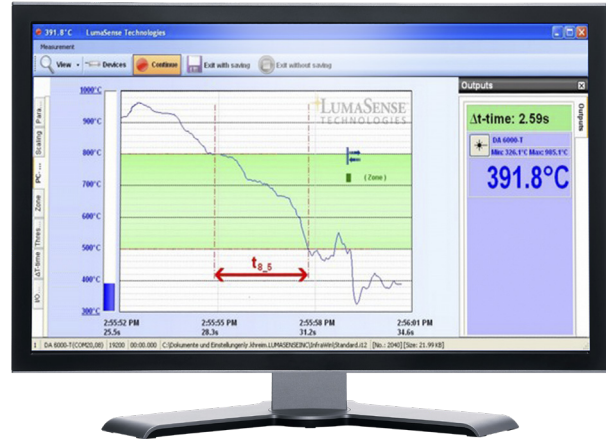


Measurement with Color Bar

In this window a temperature value for the upper or lower limit can be adjusted numerically or with the mouse.

The acquired minimum and maximum value is indicated as well as the inner temperature of the pyrometer. The emissivity is changeable during the measurement at any time.

Infrared Calculator

After input of the aperture and the focused spot size per datasheet, the calculation of spot sizes at non-focused distances is possible.

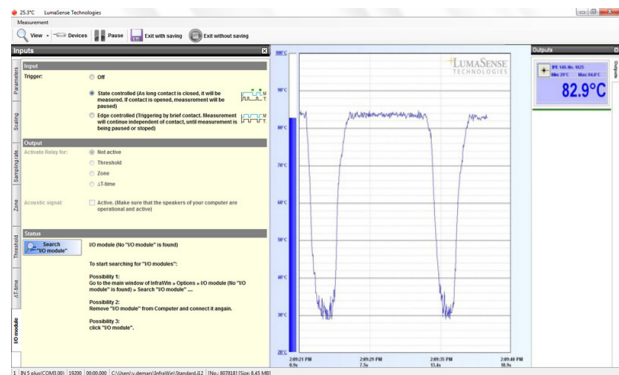

I/O Module allows users to trigger measurement externally and gives a potential free output contact.



For international contact information,
visit advancedenergy.com.

sales.support@aei.com
+1 970 221 0108

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

AE's power solutions enable customer innovation in complex semiconductor and industrial thin film plasma manufacturing processes, demanding high and low voltage applications, and temperature-critical thermal processes.

With deep applications know-how and responsive service and support across the globe, AE builds collaborative partnerships to meet rapid technological developments, propel growth for its customers and power the future of technology.

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2019 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, IMPAC®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.

