AA SERIES

High Voltage Biasing Supply

The AA Series of high-voltage regulated DC-DC converters addresses the needs of the miniature PCB-mount regulated high voltage power supply user. Designed and built utilizing state-of-the-art power-conversion topology, these units feature surface-mount technology and encapsulation techniques that provide high reliability and performance. Typical applications for the AA Series include the following: bias supplies, detectors, piezos, amplifiers, and photomultiplier tubes (PMT).

- 22% smaller than standard A Series
- 8 models from 0 to 62V through 0 to 6kV
- 4, 20 or 30 watts of output power
- Maximum Iout capability down to 0 Volts
- Wide input voltage range



- Indefinite output short-circuit protection
- Output current & voltage monitors
- Fixed-frequency, low-stored-energy design
- >1,250,000 hour MTBF @65°C
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)


PARAMETER	CONDITIONS	MODELS UNI									UNITS															
INPUT							12	2V											24	ł۷						
Voltage Range	Full Power		+ 11 to 16 + 23 to 30													VDC										
Voltage Range	Derated Power Range	+ 9 to 32 + 9 to 32													VDC											
Current	Standby / Disable	< 30 < 30													mA											
Current	No Load, Max Eout	< 100 < 90													mA											
Current	Max Load, Max Eout		~ 400 ~ 1350													mA										
AC Ripple Current	Nominal Input, Full Load	< 80 < 80 r														mA p-p										
OUTPUT		1,	1/16AA 1/8				8AA 1/4AA 1/					/2/	A	1AA Z			2AA 4AA			4AA	AA 6AA					
Voltage Range	ge Range Nominal Input		0 to 62		-	0 to 12	5	0 to 25		0	0) to 500		0 to 1,000		0 to 2,000		00	0 to 4,000		0 to 6,000		VDC		
Nominal Input Voltage / M	odel	12	24	24	12	24	24	12	24	24	12	24	24	12	24	24	12	24	24	12	24	24	12	24	24	VDC
Power	Nominal Input, Max Eout	4	20	30	4	20	30	4	20	30	4	20	30	4	20	30	4	20	30	4	20	30	4	20	30	Watts
Current	lout Entire Output Voltage Range	64	320	480	32	160	240	16	80	120	8	40	60	4	20	30	2	10	15	1	5	7.5	0.67	3.3	5	mA
Current Scale Factor	Full Load	42.67	969.7	960	11.64	237	258	3.27	70.48	72.7	.79	17.78	17.65	.37	4.60	4.62	.192	1.52	1.52	.090	.752	.76	.066	.490	.50	mA/V
Voltage Monitor Scaling			$10.1 \pm 2\%$ into $10\text{M}\Omega$ $100.1 \pm 2\%$ into $10\text{M}\Omega$													-										
Ripple	Full Load, Max Eout	0.03	0.06	0.15	0.03	0.038	0.038	0.023	0.04	0.05	0.01	0.01	0.011	0.026	0.048	0.073	0.01	0.011	0.046	0.042	0.050	0.070	0.035	0.024	0.046	%V p-p
Dynamic Load Regulation	½ to Full Load, Max Eout per .1mA	<.12	<.12	<.12	<.12	<.12	<.12	<.20	<.20	<.20	<.50	<.50	<.50	<1.0	<1.0	<1.0	<2.0	<2.0	<2.0	<4.0	<4.0	<4.0	<6.0	<6.0	<6.0	V pk
Line Regulation	Nom. Input, Max Eout, Full Power												< 0.	01 %												VDC
Static Load Regulation	No Load to Full Load, Max Eout												< 0.	.01%												VDC
Stability	30 Min. warmup, per 8 hr/ per day											< 0	.01%	/ < 0	.02%											VDC
PROGRAMMIN	G & CONTROLS											Α	LL 1	ГΥР	ES											
Input Impedance Nominal Input		+ Output Models 1.1MΩ to GND, - Output Models 1.1MΩ to +5 Vref														MΩ										
Adjust Resistance Typical Potentiometer Values									10K	to 100	K (Pot	acros	s Vref.	& Sigi	nal GNE	, Wipe	er to Ad	djust)								Ω
Adjust Logic 0 to +5 for +0ut, +5 to 0 for - Out									+4.6	4 VDC	for +	Outpu	or +0	.36 foi	r -Outpi	ıt = N	omina	l Eout								-
Output Voltage & Impedance T=+25°C											+ 5.0	OVDC	± 2%,	Zout =	= 464Ω	± 1%	,)									-
Enable/Disable			0 to +0.5 Disable, +2.4 to 32 Enable (Default = Enable)														VDC									
ENVIRONMENT	ΓAL											Α	LL 1	ГΥР	ES											
Operating	rting Full Load, Max Eout, Case Temp.			-40 to +65													°C									
Coefficient	Over the Specified Temperature											±	50 (±25	5 Optio	nal)											PPM/°C
Thermal Shock	Mil-Std 810, Method 503-4, Proc. II										-40 t	0 +65												°C		
Storage	Non-Operating, Case Temp.	-55 to +105										°C														
Humidity	All Conditions, Standard Package											0 to 9	5% no	n-con	densing											-
Altitude Standard Package, All Conditions			Sea Level through Vacuum												-											
Shock Mil-Std-810, Method 516.5, Proc. IV													2	20												G's
Vibration	Mil-Std-810, Method 514.5, Fig.514.5C-3]	10												G's

Specifications subject to change without notice.



AA SERIES

High Voltage Biasing Supply

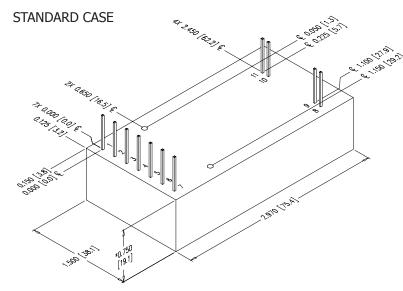

CONNECTIONS						
PIN	FUNCTION					
1	Input-Power Ground Return					
2	Positive Power Input					
3	Iout Monitor					
4	Enable/Disable					
5	Signal Ground Return					
6	Remote Adjust Input					
7	+5VDC Reference Output					
8	HV Ground Return					
9	Eout Monitor					
10 & 11	HV Output					

All grounds joined internally. Power-supply mounting points isolated from internal grounds by $>100k\Omega$, .01uF / 50V (Max) on all models except -M (20W and above), -M-E, and -M-H configurations which are 0Ω .





Rev. W 2/14

Non-RoHS compliant units are available. Please contact the COMPLIANT factory for more information.



CONSTRUCTION

Epoxy-filled DAP box certified to ASTM-D-5948

Volume 3.34in³ (54.8 cc) Weight 4.0oz (114g)

TOLERANCE

Overall $\pm 0.050''$ (1.27) Pin to Pin $\pm 0.015''$ (0.38) Mounting hole location ±0.025" (0.64)


NOTES

20W and 30W versions are an additional 0.062" (1.57) in height. -M equipped units are an additional 0.030" (0.76) for all dimensions. Contact UltraVolt's Customer Service Department for drawings of models equipped with -E or -H options.

Downloadable drawings (complete with mounting & pin information) and 3D models are available online.

ORDERING INFORMATION								
	0 to 62 VDC Output	1/16AA						
	0 to 125 VDC Output	1/8AA						
	0 to 250 VDC Output	1/4AA						
Typo	0 to 500 VDC Output	1/2AA						
Туре	0 to 1,000 VDC Output	1AA						
	0 to 2,000 VDC Output	2AA						
	0 to 4,000 VDC Output	4AA						
	0 to 6,000 VDC Output	6AA						
Input	12VDC Nominal	12						
Input	24VDC Nominal	24						
Polarity	Positive Output	-P						
Polarity	Negative Output	-N						
	Watts Output (12 V Only)	4						
Power	Watts Output (24 V Only)	20						
	Watts Output (24 V Only)	30						
Case	Plastic Case - Diallyl Phthalate	(Standard)						
Case	'Eared' Chassis Mounting Plate	-Е						
Heat Sink	.500" High (sized to fit case)	-H						
Shield	Six-sided Mu-Metal Shield	-M						
Temp. Coefficient	25PPM Temperature Coefficient	-25PPM						
Enhanced Interface	5V Control and Monitors	-I5						
Limanceu Interrace	10V Control and Monitors (24Vin only)	-I10						

Note: For more information on the enhanced interface options, download the I5/I10 Option datasheet.



Popular accessories ordered with this product include CONN-KIT and BR-18 mounting bracket kit.

